



N = Number of poles
Dim A=Nx5.08
Dim B=(N-1)x5.08


	Dim A	Dim B
2-6p	±0.15	±0.15
7-12p	±0.20	±0.20
13-18p	±0.30	±0.30
19-24p	±0.40	±0.40

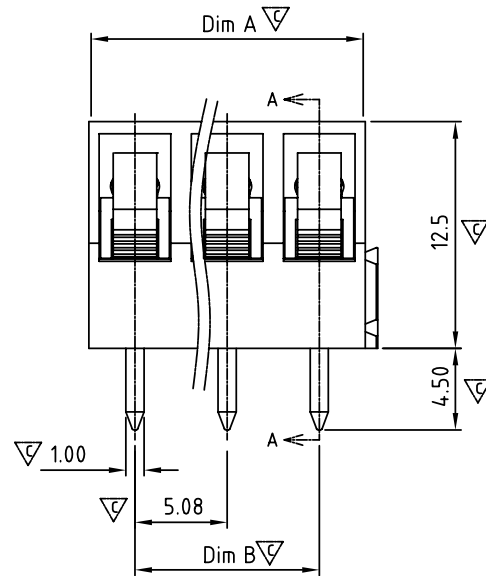

N=Number of contacts

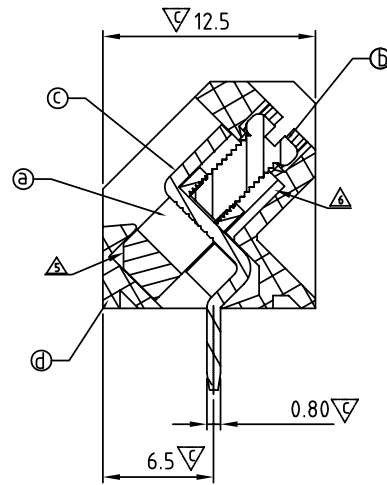

SECTION A-A

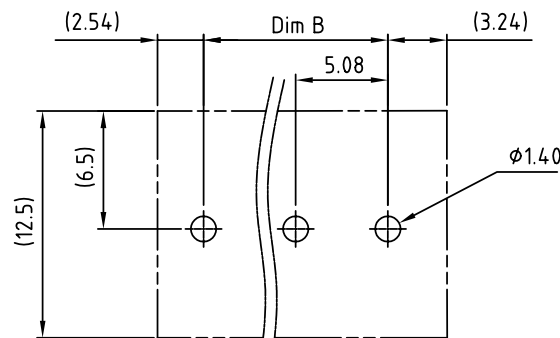

P.C.B. LAYOUT

SIGN	DATE	DESCRIPTION	APPROVER
△	11/28'06	Electrical changed	Tony
△	04/30'09	Add VDE Standard	Eris
△	04/30'09	The tolerance of dimension is changed	Eris
△	04/30'09	Temperature changed from -33' 105°C to -40' 115°C	Eris
△	09/14'09	Add chamfer	Aaron
△	09/22'11	Structure changed	ChenMing
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

Material

- Item① Clamp: Brass,Ni plated
- Item② Terminal screw: Steel Zinc plating "-" slot type.
- Item③ Wire guard solder pin: Brass, Tin plated
- Item④ Terminal housing: Thermoplastic (UL94V-0)

- △ △ Electrical: cULus/VDE
- Voltage rating: 300V/250V
 - Current rating: 15A/10A
 - Wire range: 0.34-4.0mm²
 - Solid wire(AWG): 12-24
 - Stranded wire(AWG): 12-24
 - Torque: 3.5 Lb-In / 0.4 N.m
 - Screw: M2.5
 - Wire strip length: 6-7mm
 - Withstanding Voltage: 1.6 KV/2 KV
 - Operating temperature: -40°C to +115°C
 - Soldering temperature: 250°C±10°C/5 Sec
 - Safety Approval: cULus VDE
 - Critical dimension: 1.00

TG xx 51 x x B xxx G

No. of poles end
stackable design
02 2 CONTACTS
03 3 CONTACTS
...
24 24 CONTACTS

0 Black (RAL9005)
2 Red (RAL3001/D)
3 Orange(RAL2011/P)
4 Yellow(RAL1018/A)
5 Green(RAL6018/T)
6 Blue (RAL5015/A)
8 Grey(RAL7035/D)

Dim L
0 4.5mm
3 3.2mm

RoHS
Pb<40,000ppm

0000:"@Logo (Standard)
000A:"ANYTEK"Logo
Any special item by
customer request,
please contact sales
department.

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		TG 5.08 Series 2P-24P Long Interlock type			
PART NO.	TGxx51xxBxxxG			DWG NO.	8TG0201
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
			ChenMing 2011.09.22		
				Tolerance	
					X. ±0.50
					X.X ±0.30
					X.XX ±0.10
					X° ±1°
				SHEET: 01/01	REV.: G