
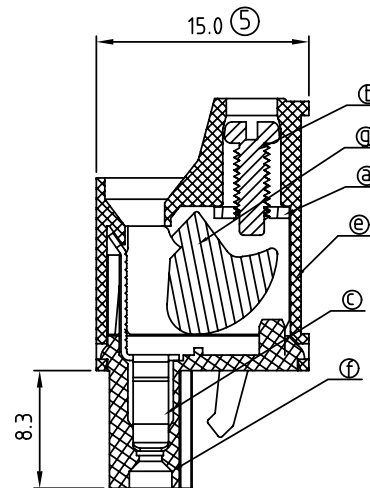




SIGN	DATE	DESCRIPTION	APPROVER
	02/07'06	Part No. changed	Tony
	8/16'06	Added TUV standard	Tony
	12/02'08	Flange screw changed from "-" to "+/-"	Tony
	2010.03.23	Add the 2p mark	Jacke
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

- Item a Clamp: Steel zinc plated.
- Item b Terminal screw: Steel Zinc plating “-” slot type
- Item c Female contact: PhBz Tin plated
- Item d With flange screw: Steel zinc plated M2.5 “+/-” slot type
- Item e Terminal (Up body): Thermoplastic (UL94V-0)
- Item f Terminal (Down body): Thermoplastic (UL94V-0)
- Item g Clampage: Steel Zinc plated
Electrical cULus/TUV
- Voltage rating: 300VAC/300VAC
- Current rating: 20A/20A
- Wire range: 0.34-2.5mm²
- Solid wire(AWG): 12-22
- Stranded wire(AWG): 12-22
- Torque: 3.5Lb-In / 0.4Nm
- Screw: M2.5
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV/2.5KV
- Operating temperature: -40°C to +115°C
- Safety approval:

POLES			G: Pb<4000ppm
02 pole			
''' '''	Color		0000: Standard (Steel screw plating Cr ^{III})
24 pole	0 Black (RAL9005)		000A: "ANYTEK" Mark
	2 Red (RAL3001/D)		Any special item by
	3 Orange(RAL2011/P)		customer request.
	4 Yellow(RAL1018/A)		please contact sales
	5 Green(RAL6018/T)		department.
	6 Blue (RAL5015/A)		
	8 Grey(RAL7035/D)		

ANYTEK				CUSTOMER COPY ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD			
TITLE		VM 5.0mm W/Flange Series					
PART NO.		VMxx75x2xxxxG			DWG NO.		8VM0002
APPROVED		CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance
		Jacke 2010.03.23	Jacke 2010.03.23			UNIT: mm	X. ±0.50
						SCALE: NONE	X.X ±0.30
				SHEET: 01/01		REV.: F	X° ±1°