
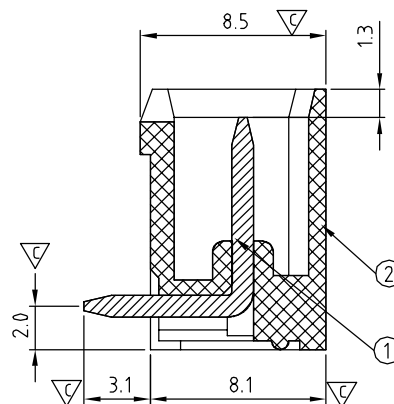
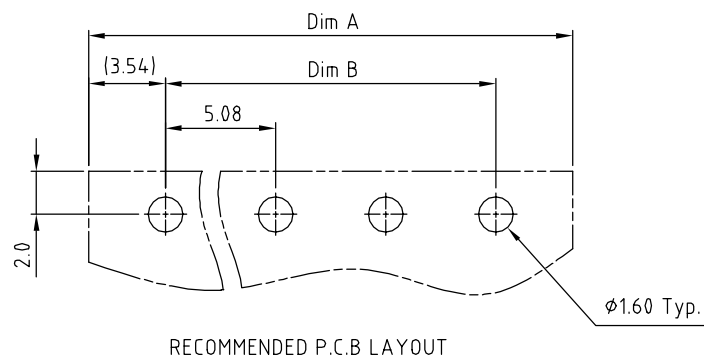
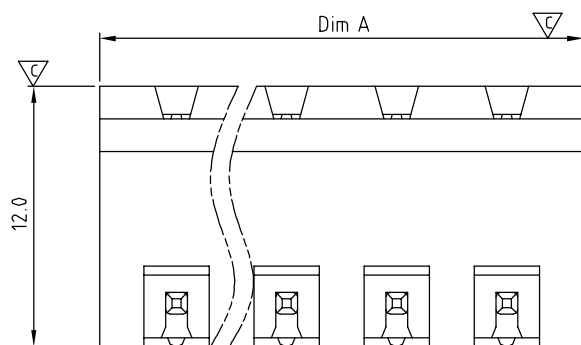


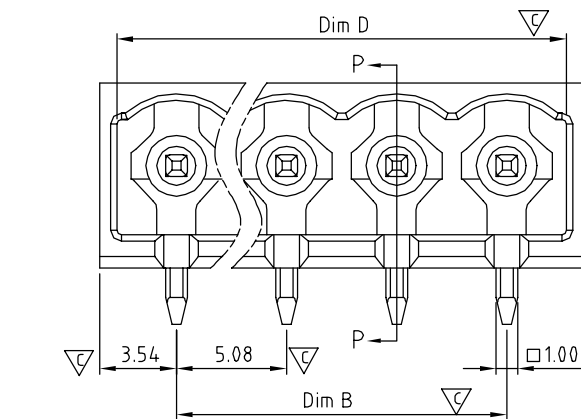

SECTION P-P

DIMENSION

Dim A	$(N-1) \times 5.08 + 7.08$
Dim B	$(N-1) \times 5.08$
Dim D	$(N-1) \times 5.08 + 5.48$

N = Number of poles

2p-6p	±0.15
7p-12p	±0.25
13p-16p	±0.35
17p-24p	±0.40

SIGN	DATE	DESCRIPTION	APPROVER

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material:

- Item ① Contact pin: Copper, Tin plated
- Item ② Insulator(housing): Thermoplastic (UL94V-0)

Electrical: cULus /VDE /TUV

- Voltage rating: 300V/300V/300V
- Current rating: 20A/20A/20A
- Withstanding Voltage: 1.6 KV/2.5KV/2.5KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 260°C±5°C/5 Sec
- Safety Approval:
- Critical dimension:

OQ xx 5 4 x 1 Fxxx G

No. OF POLES
02: 2 POLES

24: 24 POLES

COLOR

- 0 Black (RAL9005)
- 2 Red (RAL3001/D)
- 3 Orange(RAL2011/P)
- 4 Yellow(RAL1018/A)
- 5 Green(RAL6018/T)
- 6 Blue (RAL5015/A)
- 8 Grey(RAL7035/D)
- 9 White(RAL1102)
- C Green(RAL6018/U)

G RoHS compliant
(lead<4%)
In copper Alloy

F000 "G" Logo
F00A "ANY" Logo
... ..

Any special item by
customer request,
please contact sales
department

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	OQ 5.08mm 90° Close Series 2p-24p 反向折弯						
PART NO.	OQxx54x1FxxxG			DWG NO.	80Q07210		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			
		Chen Bo 11/08`12	Chen Bo 11/08`12			UNIT: mm	X. ±0.50
						SCALE: NONE	X.X ±0.30
				SHEET: 01/01	REV.: A		X.XX ±0.10
							X° ±1°